





Product Features

- IC-F rated in New Zealand
- Replaces R80 incandescent
- IP44 ingress protection
- Optical grade lens
- Custom PCB architecture
- Certified diodes to LM80
- High luminous efficiency
- Wide light distribution (120°)
- High efficiency driver with large input slots
- Fast installation with triac dimmable option
- 5 Year non-declining product guarantee
- ANSI colour binned with Tru-Light technology



LIGHT LEVELS

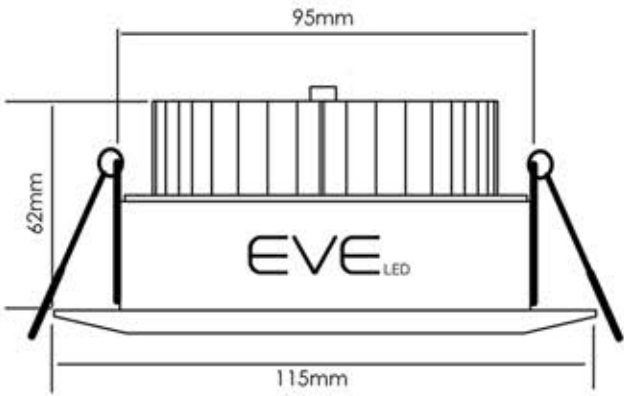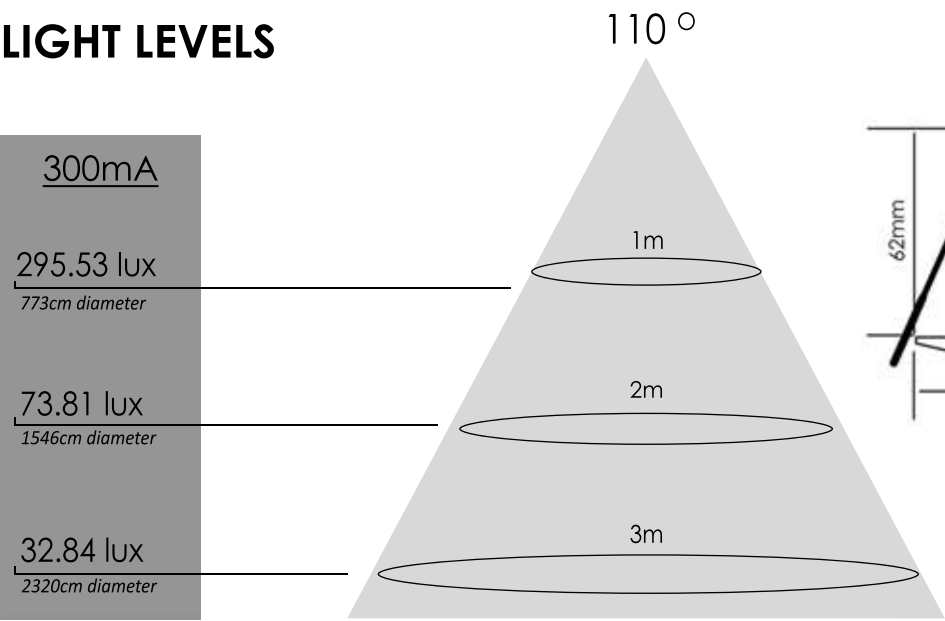

Height: 6.2 cm (2.44 in)
Width: 11.5 cm (4.52 in)
Cutout Range: 95-110mm (3.74-4.33 in)
Weight: 0.5kg (1.1 lbs)
Optical Beam Angle: 120°

Technical Information

Model	Product Code	CCT	Driver	Power	Trim	Cutout	Lumens	Voltage	Rating
EVE LED Efficiency & Affordability	E-9W14NWWW	3000K	Non-Dimmable	9W	White	97-110mm	700	27	IC-F
	E-9W14NSWW	3000K	Non-Dimmable	9W	Silver	97-110mm	700	27	IC-F
	E-9W14NWNW	5000K	Non-Dimmable	9W	White	97-110mm	750	27	IC-F
	E-9W14NSNW	5000K	Non-Dimmable	9W	Silver	97-110mm	750	27	IC-F
	E-9W14DWWW	3000K	Dimmable	9W	White	97-110mm	700	27	IC-F
	E-9W14DSWW	3000K	Dimmable	9W	Silver	97-110mm	700	27	IC-F
	E-9W14DWNW	5000K	Dimmable	9W	White	97-110mm	750	27	IC-F
	E-9W14DSNW	5000K	Dimmable	9W	White	97-110mm	750	27	IC-F