

EVE XL- RECESSED IC-F LUMINAIRE

E-14W14





Product Features

- IC-F rated in New Zealand
- IP44 ingress protection
- Ultra S2 lighting engine
- Certified diodes to LM80
- Optical grade lens.
- Clean light distribution with no visible diodes
- High efficiency driver with large input slots
- Fast installation with triac dimmable option
- 5 Year non-declining product guarantee
- ANSI colour binned with Tru-Light technology
- Wide beam Angle (120°)
- Diverse retrofit options (120-135mm cutout)



LIGHT LEVELS

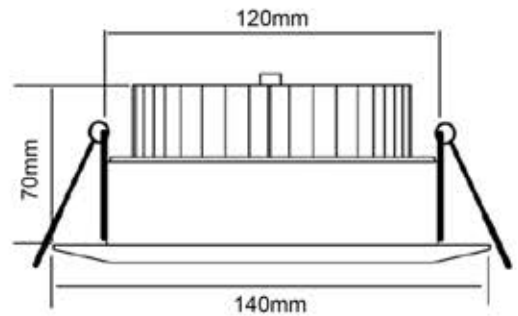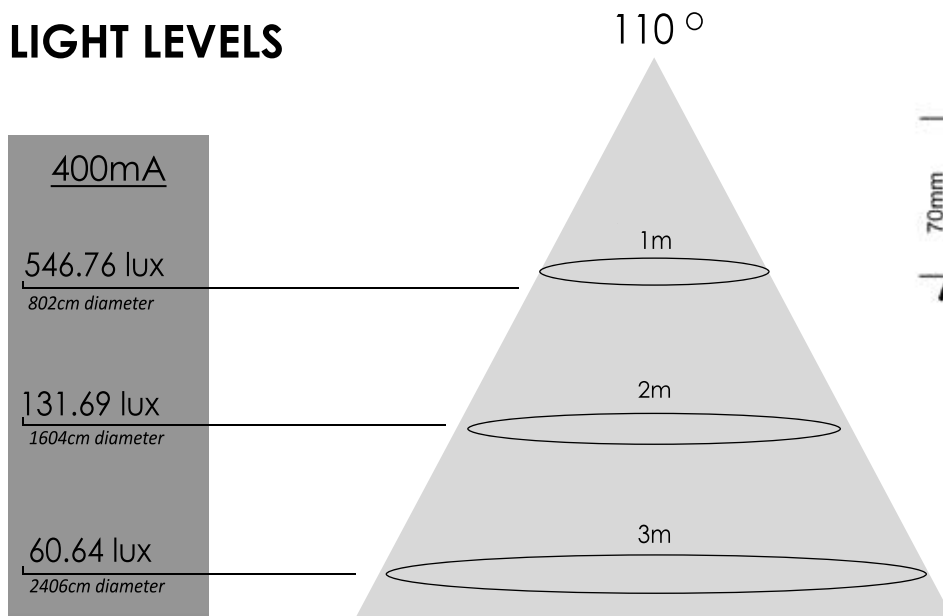

Height: 70mm (2.75 in)
Width: 140mm (5.51 in)
Cutout Range: 120-135mm (4.72-5.31 in)
Weight: 0.9kg (1.9 lbs)
Optical Beam Angle: 120°

Technical Information

Model	Product Code	CCT	Driver	Power	Trim	Cutout	Lumens	Voltage	Rating
Eve XL (14W) Powerful & Versatile	E-14W14NWWW	3000K	Non-Dimmable	14.4W	White	120-135mm	1190	36	IC-F
	E-14W14NSWW	3000K	Non-Dimmable	14.4W	Silver	120-135mm	1190	36	IC-F
	E-14W14NWNW	5000K	Non-Dimmable	14.4W	White	120-135mm	1300	36	IC-F
	E-14W14NSNW	5000K	Non-Dimmable	14.4W	Silver	120-135mm	1300	36	IC-F
	E-14W14DWWW	3000K	Dimmable	14.4W	White	120-135mm	1190	36	IC-F
	E-14W14DSWW	3000K	Dimmable	14.4W	Silver	120-135mm	1190	36	IC-F
	E-14W14DWNW	5000K	Dimmable	14.4W	White	120-135mm	1300	36	IC-F
	E-14W14DSNW	5000K	Dimmable	14.4W	White	120-135mm	1300	36	IC-F